



INSTALLATION INSTRUCTIONS

Accessory
DOOR EDGE GUARDS


Application
2012 ACCORD
4-DOOR

Publications No.
All 46532


Issue Date
AUG 2011

PARTS LIST

Right front door edge guard



Left front door edge guard




Right rear door edge guard



Left rear door edge guard



Seam sealant cutting tool



TOOL AND SUPPLIES REQUIRED

Rubber mallet
Felt-tip pen
Touch-up paint
Scale

INSTALLATION


Customer Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."

NOTE:

- When installing door edge guards and body side moldings, install the door edge guards first.
 - These instructions show the right door edge guards being installed. The same procedure applies to installing the left door edge guards.
1. Clean and wax the areas to be covered. Use a high quality paste wax.
 2. Identify each door edge guard by holding it up to the door and matching its contour with the door edge.

Front Door Edge Guards



3. Measure and mark the sealant at the measurement shown.

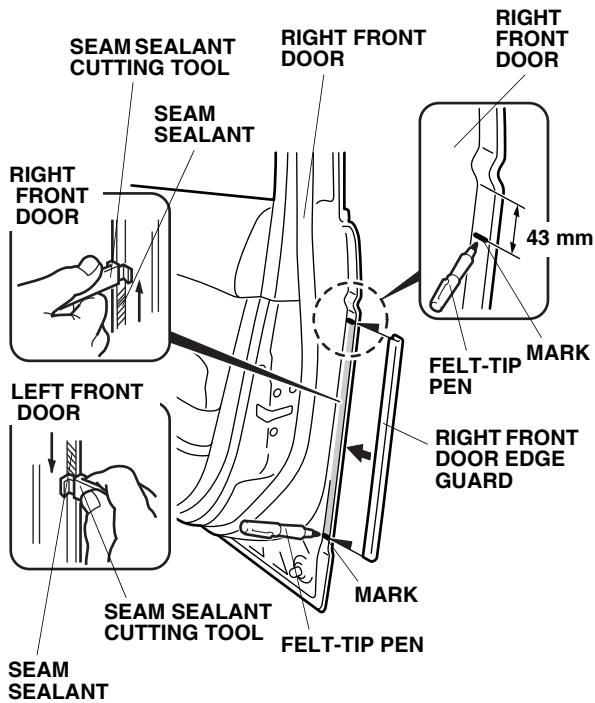

4. Position the right front door edge guard on the right front door, and align the top with the mark you made in step 3. Mark the sealant at the bottom of the edge guard.
5. Position the cutting edge of the seam sealant cutting tool against the door edge, and trim the seam sealant from mark to mark.
NOTE: The cutting tool cuts in only one direction. Move it upward on the right and downward on the left side of the vehicle.
6. Apply touch-up paint to the cut seam sealant area, and let it dry.

7. Position the right front door edge guard on the right front door edge, and tap it into position with a series of light taps using a rubber mallet.


NOTE: Be sure the right front door edge guard position is correct. Once in place, do not remove, reposition, or reinstall the right front door edge guard, or it will not hold securely.

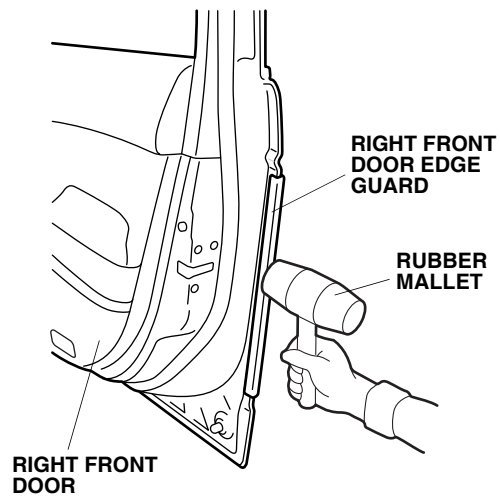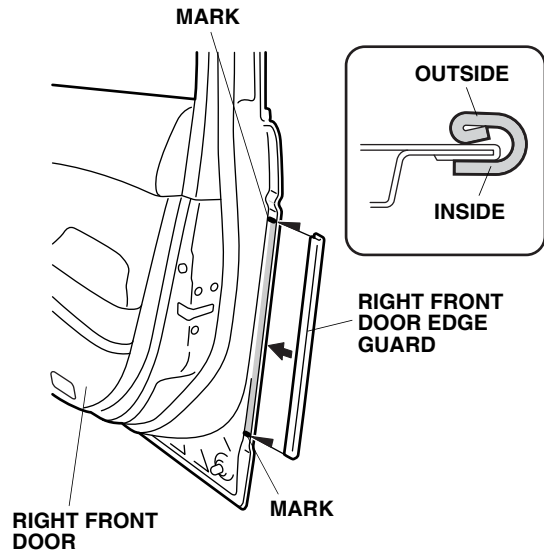

8. Repeat steps 3 through 7 to install the left front door edge guard.

Rear Door Edge Guards



9. Measure and mark the sealant at the measurement shown.

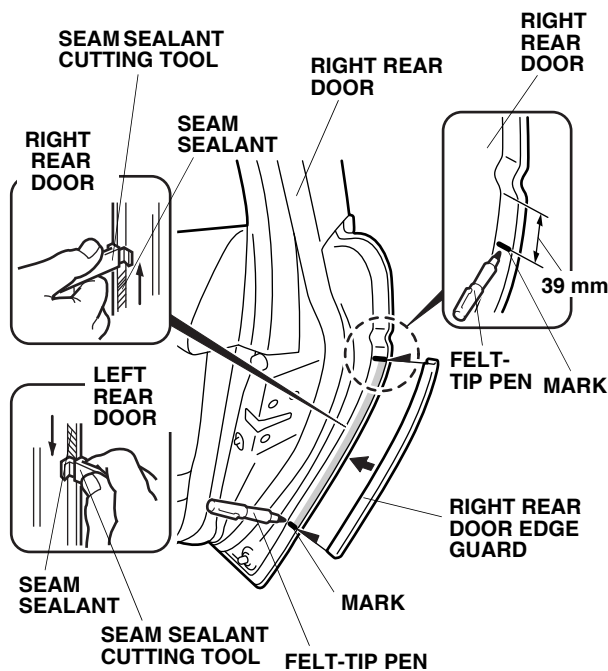

10. Position the right rear door edge guard on the right rear door, and align the top with the mark you made in step 9. Mark the sealant at the bottom of the right rear edge guard.
11. Position the cutting edge of the seam sealant cutting tool against the right rear door edge, and trim the seam sealant from mark to mark.
NOTE: The cutting tool cuts in only one direction. Move it upward on the right and downward on the left side of the vehicle.
12. Apply touch-up paint to the cut seam sealant area, and let it dry.

13. Position the right rear door edge guard on the right rear door edge, and tap it into position with a series of light taps using a rubber mallet.

NOTE: Be sure the right rear door edge guard position is correct. Once in place, do not remove, reposition, or reinstall the right rear door edge guard, or it will not hold securely.

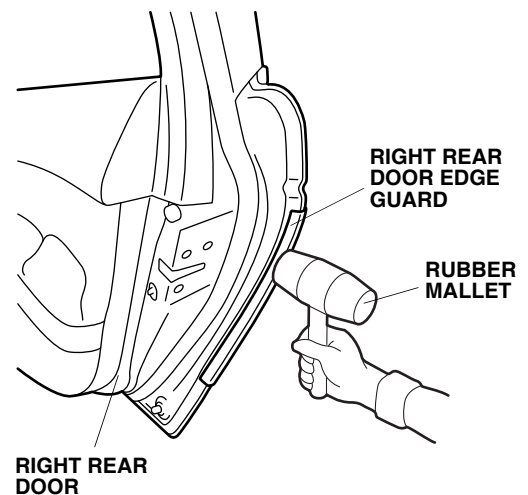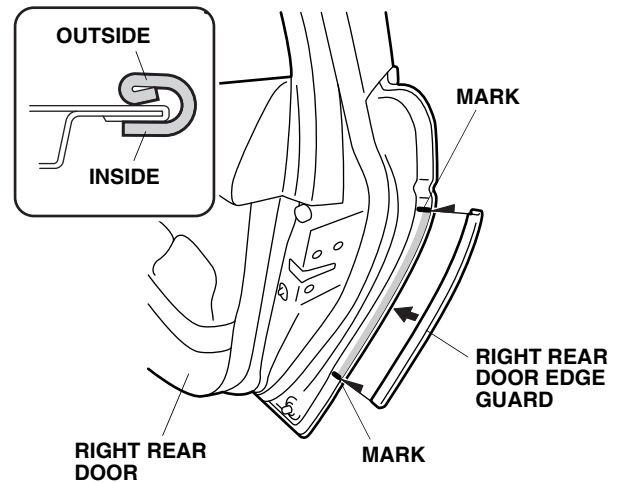

14. Repeat steps 9 through 13 to install the left rear door edge guard.